





# EAST COAST FASTENERS, INC

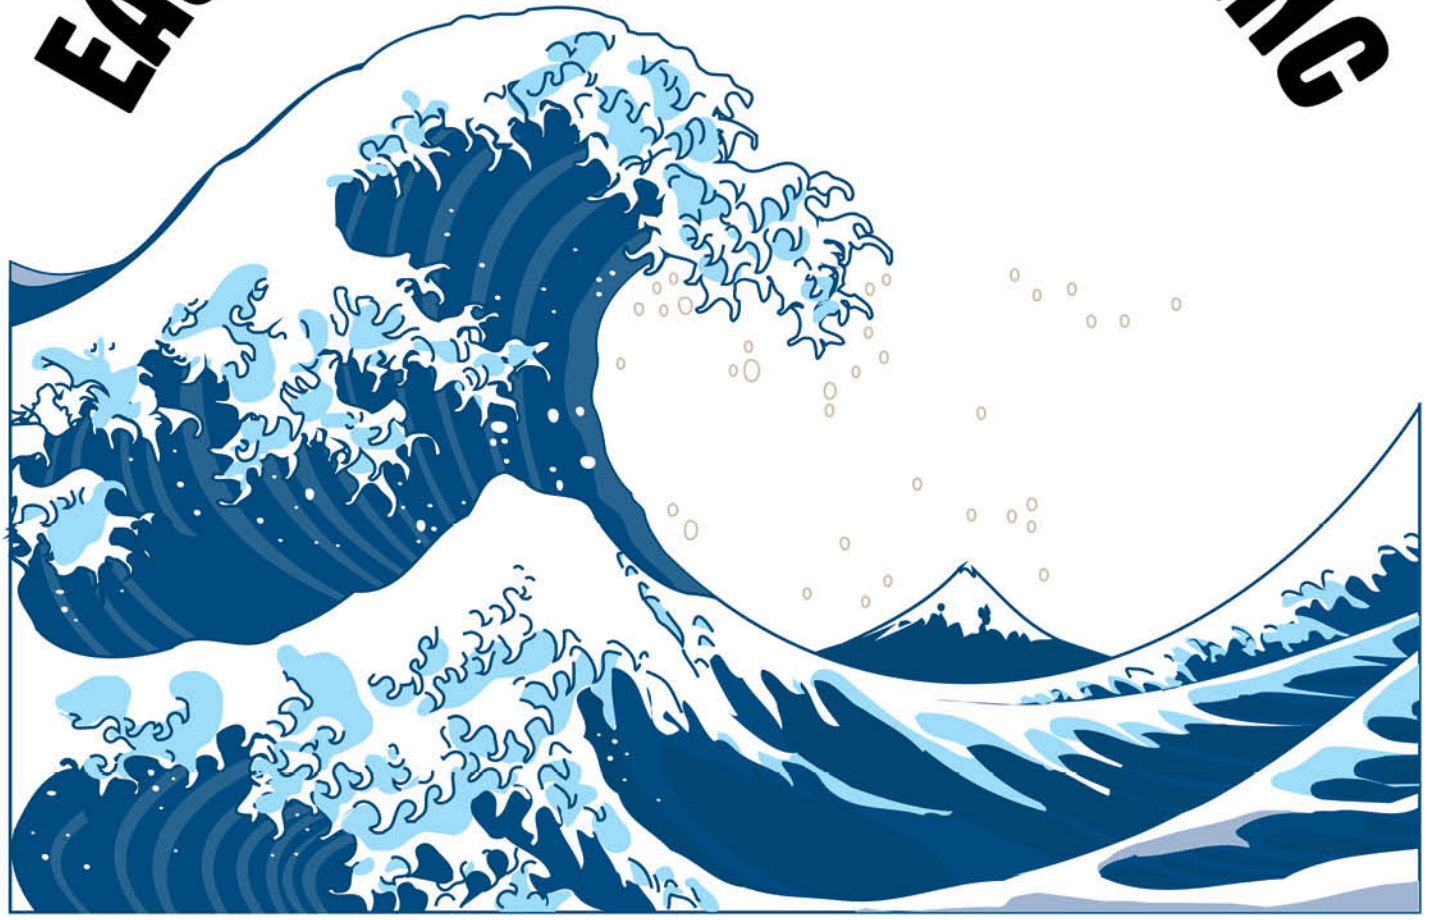


**“When you need it the most”**

**302-999-0502**



**FIRESTOPPING PRODUCT CATALOG**



**Metacaulk® 1000**

Intumescent, water-based firestop sealant

Code	Description	Qty.
66640	10.3 oz. cartridge	12
66303	30 oz. cartridge	12
66312	20.2 oz. foil pack	12
66305	1 gal.	4
66307	2 gal.	1
66309	5 gal.	1

**APPLICATION** • Will prevent the spread of fire through joint openings and through-penetrations • No dilution or mixing required • Can be used in areas under constant vibration and movement • Use in fire-rated gypsum wallboard partitions, concrete walls or floors, wood floors and concrete or corrugated steel deck floor/ceiling assemblies

**RECOMMENDED FOR** • Metal pipes • Insulated pipes • Fiberglass & plastic pipes • Wall construction joints • Power & telephone cables



**FEATURES**

- UL Classified systems up to 4 hrs.
- Highly intumescent
- Excellent freeze-thaw
- For interior use - paintable
- VOC compliant
- 3 year shelf life
- STC rating 62
- Tested in accordance with ASTM E814 (UL 1479) & ASTM E1966 (UL 2079)
- Mold inhibitor tested to ASTM G21
- Complies to UL required Accelerated Aging and High Humidity Testing
- Color: Red



See ordering chart for container sizes available

\*"FBC" System Compatible" indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® pipe and fittings.

\*\*FBC®, FlowGuard Gold®, BlazeMaster® and Corzan® are licensed trademarks of The Lubrizol Corporation.





## METACALK® FIRESTOP SEALANTS

EAST COAST FASTENERS, INC

### Metacaulk® MC 150+

General purpose firestop sealant

Code	Description	Qty.
66648	10.3 oz. cartridge	12
66383	30 oz. cartridge	12
66385	20.2 oz. foil pack	12
66389	5 gal.	1

#### FEATURES

- Flexible
- Non-sag
- UL Classified up to 4 hrs.
- 3 year shelf life
- Tested in accordance with ASTM E814 (UL 1479) & ASTM E1966 (UL 2079)
- STC rating 65
- Mold inhibitor tested to ASTM G21
- Color: Red



**APPLICATION** • One component, general purpose fire-rated sealant and smoke seal for construction joints and through-penetrations on both horizontal and vertical surfaces

- Non-sag caulking grade sealant that is easy to apply as well as to retrofit
- Can be used in areas under constant vibration or movement

#### RECOMMENDED FOR

- Metal pipes • Insulated pipes
- Fiberglass and plastic pipes
- Wall construction joints
- Power and telephone cables



### Metacaulk® 350i

Intumescent firestop sealant

Code	Description	Qty.
66616	10.3 oz. cartridge	12
66611	20.2 oz. foil pack	12
66613	5 gal.	1

#### FEATURES

- Flexible
- Excellent freeze-thaw
- For interior use - paintable
- STC rating 53
- Tested in accordance with ASTM E814 (UL 1479) & ASTM E1966 (UL 2079)
- 3 year shelf life
- Complies to UL required Accelerated Aging and High Humidity Testing
- Color: Red



**APPLICATION** • One component, general purpose sealant and smoke seal

- Intumescent, water-based, non-sag caulking grade sealant that is easy to apply and great for retrofits
- Suitable for dynamic movement.

#### RECOMMENDED FOR

- Metal pipes • Insulated pipes
- Fiberglass & plastic pipes
- Wall construction joints
- Power & telephone cables



\*FBC™ System Compatible™ indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® pipe and fittings.

\*\*FBC™, FlowGuard Gold®, BlazeMaster® and Corzan® are licensed trademarks of The Lubrizol Corporation.

# 302-999-0502



## Metacaulk® 835+

Elastomeric, silicone firestop sealant

Code	Description	Qty.
66645	10.15 oz. cartridge	12
66019	5 gal.	1
66300	20.2 oz caulk grade	12
66301	20.2 oz self-leveling	12



**FEATURES**

- Exterior / Interior use
- Weather/chemical resistant
- Excellent moisture resistance
- Tested in accordance with ASTM E814 (UL 1479) & ASTM E1966 (UL 2079)
- STC rating 55
- Meets ASTM C920, Type S, Grade NS, Class 25, Use NT, M, G, A, O (For SL- ASTM C920, Type S, Grade SL, Class 24, Use NT, M G, A, O)
- 2 year shelf life
- Color: Gray

**APPLICATION** • Used in systems where dynamic movement is expected  
 • Resistant to chemical exposure

**RECOMMENDED FOR**  
 • Cable and cable trays • EMT  
 • Insulated and uninsulated steel pipe • Construction and control joints • Interior expansion joints



## Metacaulk® 950

Non-combustible firestop sealant

Code	Description	Qty.
66643	10.3 oz. cartridge	12



**FEATURES**

- Gas/Smokeless under fire exposure
- Hardened cure
- Interior application
- Tested in accordance with ASTM E814 (UL 1479) & ASTM E1966 (UL 2079)
- 2 year shelf life
- Color: Beige

**APPLICATION** • Formulated with inorganic materials  
 • Will not create smoke or toxic gases • For interior applications only  
 • Not for use in vibration or wet environments

**RECOMMENDED FOR** • Large openings • PVC/CPVC pipe (closed only) • EMT • Steel, Copper, and Aluminum Pipe  
 • Multiple Pipes, Conduit, and Cable • Telephone, Power, Romex Cable • Static Construction Joints



\*FBC™ System Compatible™ indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® pipe and fittings.

\*\*FBC™, FlowGuard Gold®, BlazeMaster® and Corzan® are licensed trademarks of The Lubrizol Corporation.





## METACAULK® FIRESTOP SPRAYS

**EAST COAST FASTENERS, INC**

### Metacaulk® 1200

Code	Description - (Red)	Qty.
66379	5 gal. spray	1
66292	20.2 oz. caulk grade	12
66015	30 oz. caulk grade	12
66387	5 gal. caulk grade	1
66529	5 gal. spray (USA)	1

Code	Description - (White)	Qty.
66527	5 gal. spray	1
66294	20.2 caulk grade	12
66525	30 oz. caulk grade	12
66526	5 gal. spray (USA)	1
66386	5 gal caulk grade	1



#### FEATURES

- Extremely flexible
- Excellent dynamic movement
- Excellent freeze-thaw
- STC rating 65
- UL Classified up to 4 hrs
- Tested in accordance with ASTM E814 (UL 1479) & ASTM E1966 (UL 2079)
- Mold inhibitor tested to ASTM G21
- 3 year shelf life
- Color: Red or White

### Spray & caulk firestop Mastic

**APPLICATION** • Cures to an elastomeric membrane seal that is suitable for dynamic movement • Mastic spray provides a fast, economical means of installation on long joint runs

**RECOMMENDED FOR** • Construction joints such as: top of the wall, curtain wall perimeter, expansion, and control • Cable trays • HVAC Ductwork • Deflection Track Wall Systems



### C70 Industrial Coating

Code	Description	Qty
50250	5 gal. gray	1
50253	5 gal. white	1



#### FEATURES

- No cable derating
- Interior use
- Easy to apply
- Cures to a flexible seal
- 2 year shelf life
- Color: Gray or White

### Acrylic latex for power cables

**APPLICATION** • Acrylic latex heavy duty spray coating designed to prevent vertical and horizontal spread of fire along grouped or single communication or power cables. • Compatible with and adheres to typical cable jacketing materials • Suitable for areas of limited movement



\*FBC™ System Compatible™ indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® pipe and fittings.

\*\*FBC™, FlowGuard Gold®, BlazeMaster® and Corzan® are licensed trademarks of The Lubrizol Corporation.

**302-999-0502**

EAST COAST FASTENERS, INC

**CID**

CAST-IN-PLACE DEVICE

Intumescent service supply.



Metacaulk CID provides through floor firestop protection for all types of building service penetrations.



302-999-0502




## Cast-In-Place Device

Firestop for through floor penetration.

Code	Cast-in-Place Device	Qty.
67202	2-inch device (8-in. height)	12
67203	3-inch device (8-in. height)	12
67204	4-inch device (8-in. height)	12
67206	6-inch device (8-in. height)	6
Code	Height Extension	Qty.
67232	4-in. extension for 2-in. device	6
67233	4-in. extension for 3-in. device	6
67234	4-in. extension for 4-in. device	6
67236	4-in. extension for 6-in. device	6
Code	Deck Adapter Kit	Qty.
67222	2-inch device adapter	6
67223	3-inch device adapter	6
67224	4-inch device adapter	6
67226	6-inch device adapter	6

**APPLICATION** • Single component Cast-In-Place device, approved for use with a multitude of penetrating items. Will prevent the spread of fire from through-penetration services in concrete floors • Installs prior to concrete pour. • Casts directly into the concrete to form an embedded intumescent service supply.

**RECOMMENDED FOR** • Combustible plastic/metal pipe, power & telephone cable floor penetrations in multi-floor construction. • Installs using either temporary wood or metal forms.

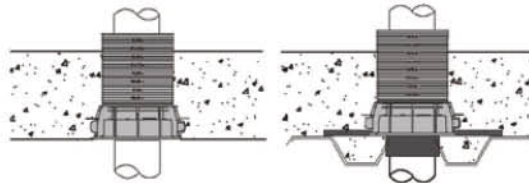

CID Alignment connectors allow tight placement of multiple penetrations.



### FEATURES

- Integral intumescent firestop
- UL Classified systems up to 3 hrs
- Eliminates drilling of concrete
- Reduces labor time
- Tested in accordance with ASTM E814 (UL 1479)
- Assembled in USA



\*"FBC" System Compatible" indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® pipe and fittings.

\*\*"FBC", FlowGuard Gold®, BlazeMaster® and Corzan® are licensed trademarks of The Lubrizol Corporation.

# 302-999-0502



## FIRESTOP DEVICES

**EAST COAST FASTENERS, INC**

### Metacaulk® Firestop Collars

Prefabricated system

Code	Description	Qty.
66352	1-1/2" Pipe Collar	12
66353	2" Pipe Collar	12
66350	3" Pipe Collar	6
66351	4" Pipe Collar	6
66354	6" Pipe Collar	2



#### FEATURES

- No measurements of material
- Fits in limited access areas
- 25% reduction of installation times
- Tested in accordance with ASTM E814 (UL 1479)
- Complies to UL required Accelerated Aging and High Humidity Testing

**APPLICATION** • UL classified for both open and closed systems • Simple locking mechanism for easy installation

**RECOMMENDED FOR** • PVC • CPVC • ABS • PVC foam core  
• ABS foam core • FRPP • PEX pipe • Electrical cable

Contact Tech Services for other options.



U.S. Patent No. 6,207,085

### Metacaulk® Intumescent Sleeve

Firestop device

Code	Description	Qty.
66584	For 2", 3" & 4" Pipe	6
66582	For 6" & 8" Pipe	1




#### FEATURES

- No steel bolts or fasteners
- Can be retrofitted
- Flexible
- Tested in accordance with ASTM E814 (UL 1479)
- Complies to UL required Accelerated Aging and High Humidity Testing

**APPLICATION** • Firestop through penetrations with a single sleeve • Ideal for combustible pipes penetrating a concrete fluted deck assembly • Eliminates the need to firestop on both sides of a penetration

**RECOMMENDED FOR** • PVC • cc-PVC • CPVC • FRPP • PP • ABS • PVDF • PEX  
• Rigid non-metallic conduit installations

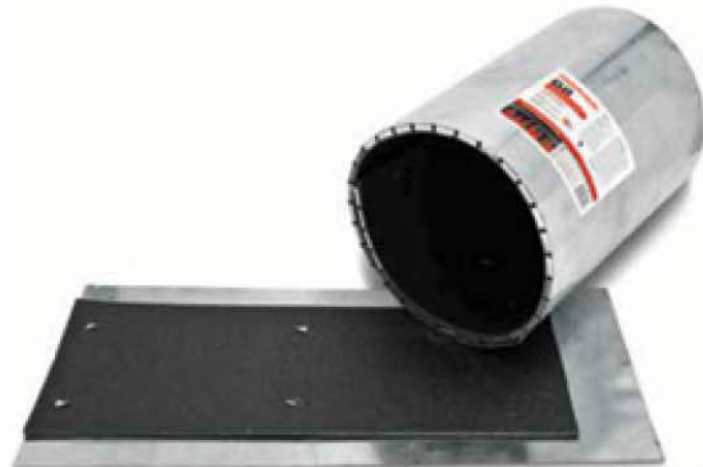

US Patent No. 6,237,085

"FBC" System Compatible" indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® pipe and fittings.

\*\*FBC®, FlowGuard Gold®, BlazeMaster® and Corzan® are licensed trademarks of The Lubrizol Corporation.

**302-999-0502**





## JOINT/WRAP STRIP

**EAST COAST FASTENERS, INC**

### Blaze Foam™

Intumescent compressible firestop foam



Code	Description	Qty.
66024	48" x 5/8" x 1.5"	40 pcs.

#### FEATURES

- Easy one step installation
- For 1 & 2 hr rated gypsum walls
- No mechanical fastening required
- Tested in accordance with ASTM E1966 (UL 2079)
- Highly intumescent
- STC rating 64
- L Rating < 1 CFM/LF



**APPLICATION** • Intumescent compressible foam used to firestop head of wall, wall to wall and bottom of wall joint applications both dynamic and static • Designed for installation within fire resistive joints with up to 2 hours F rating

#### RECOMMENDED FOR

- Head of Gypsum Wall, Wall to Wall and Bottom of Wall joint applications both dynamic and static



US Patent No. 6,207,085

### Joint Strip

Flexible material for up to 2" wide joints

Code	Description	Qty.
66700	1/16" x 1" x 82' strip	6
66701	1/16" x 1-1/2" x 82' strip	4
66704	1/16" x 2" x 82' strip	3
66702	1/16" x 2-1/2" x 82' strip	2
66703	1/16" x 3" x 82' strip	2
66705	1/16" x 4" x 82' strip	2

#### FEATURES

- No firestop caulk required
- Single sided application
- Simple & easy to use
- Tested in accordance with ASTM E814 (UL 1479) & ASTM E1966 (UL 2079)
- Complies to UL required Accelerated Aging and High Humidity Testing



**APPLICATION** • Flexible strip firestop material used in concrete and masonry floor and wall joints up to 2" wide, duct insulation and up to 4" PVC/CPVC & Membrane penetrations • Prevents the passage of fire between joints

#### RECOMMENDED FOR

- Stadium construction, tilt up panels • Curtain wall panels
- All concrete and masonry wall and floor construction joint applications



US Patent No. 6,207,085

### Wrap Strip

Flexible intumescent strip for plastic and insulated pipe

Code	Description	Qty.
66135	1" x 12'	6
66136	2" x 12'	4

#### FEATURES

- No cure time
- Easy to apply
- Long length means less waste
- Systems up to 14" PVC
- Highly intumescent
- Tested in accordance with ASTM E814 (UL 1479)
- Complies to UL required Accelerated Aging and High Humidity Testing



**APPLICATION** • Simply wrap required number of strips around penetrating item to completely fill the annular space or as required by system design • When exposed to heat, expands to form a hard char to seal off the penetration

#### RECOMMENDED FOR

- Plastic and insulated pipe applications



US Patent No. 6,207,085

\*FBC™ System Compatible™ indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® pipe and fittings.

\*\*FBC™, FlowGuard Gold®, BlazeMaster® and Corzan® are licensed trademarks of The Lubrizol Corporation.

**302-999-0502**



## ELECTRICAL OUTLET FIRESTOP

**EAST COAST FASTENERS, INC**

### Cover Guard™

Fire-rated gasket for electrical boxes

Code	Description	Qty.
66270	Double receptacle	50
66272	Single receptacle	50
66274	Double switch	50
66276	Single switch	50
66265	Single decor	50
66266	Double decor	50

**APPLICATION** • A single component fire-rated gasket for use with electrical boxes to comply with the "24 inch rule"  
• Fits under the cover plate and does not take up volume



US Patent No. 6,207,085; 6,252,167 & 7,348,484



#### FEATURES

- Good sound insulator
- Easy to install
- Highly intumescent
- STC rating 54
- Complies to UL required Accelerated Aging and High Humidity Testing



### Box Guard™

Fire-rated pad for electrical boxes

Code	Description	Qty.
66366	Single box	50
66367	Double box	50
66369	4- <sup>11</sup> / <sub>16</sub> " X 4- <sup>11</sup> / <sub>16</sub> "	50

**APPLICATION** • One component fire-rated for use in electrical boxes • It is inserted on the inside back wall of an electrical box prior to wiring



US Patent No. 6,207,085 & 6,252,167



#### FEATURES

- Adheres to back of electrical box
- Non-conductive
- Highly intumescent
- STC rating 53
- Complies to UL required Accelerated Aging and High Humidity Testing



### FRP

Fire-rated putty pads & stick

Code	Description	Qty.
66345	18 cu./in. - stick	12
66340	6" x 7" x 1/8" thick	20
66335	7" x 7" x 1/8" thick	20

**APPLICATION** • Putty sticks are used to seal around penetrating items through fire-rated walls, floors and within blank openings • Putty pads are used to maintain the hourly rating of fire-rated walls containing electrical metal outlet boxes and to reduce sound transmission • Hand moldable with no curin



#### FEATURES

- Applied by hand
- No asbestos fillers
- Pads - STC rating 60
- For interior use
- Adheres to all common building surfaces
- Tested in accordance with ASTM E814 (UL 1479)



**302-999-0502**





## FIRESTOP FOR LARGE OPENINGS

**EAST COAST FASTENERS, INC**

### Composite Sheet

For large openings with or without penetrating items

Code	Description	Qty.
66320	36" x 36"	1



**FEATURES**

- Light weight
- Thinner sheets
- Re-enterable
- No VOC
- Tested in accordance with ASTM E814 (UL 1479)
- Complies to UL required Accelerated Aging and High Humidity Testing

**APPLICATION** • Rigid fire resistive panel used to seal penetrations and restore the fire rating to floor/ceilings or walls • Made of reinforced, highly intumescent material bonded on one side to a stainless steel sheet • Ideal for clean room applications



US Patent No. 6,207,085

### FRM

Fire rated mortar - For large openings

Code	Description	Qty.
66331	20 lbs. pail	1
66334	45 lbs. bag	1



**FEATURES**

- Non-sag adjustable consistency
- High yield per lb.
- No special tools needed
- Tested in accordance with ASTM E814 (UL 1479)
- 2 year shelf life
- Color: Red

**APPLICATION** • Rapid hardening gypsum/cement compound for large openings • Sets without shrinking and can form a rigid, gas tight, fire resistant seal • Can be cut or drilled and resealed

**RECOMMENDED FOR**

- Power cables • Fiber optic
- Telephone cables • Aluminium or steel cable trays • EMT
- Copper • Steel • Cast iron pipe



### Firestop Pillows

For large temporary openings

Code	Description (Pillows)	Qty.
66362	2" x 9" x 6"	10
66363	3" x 9" x 6"	10



**FEATURES**

- Forms a very strong char
- No wire mesh required
- Easy to install - no tools
- Tested in accordance with ASTM E814 (UL 1479)
- Complies to UL required Accelerated Aging and High Humidity Testing

**APPLICATION** • Intumescent • Designed for use primarily in large temporary or frequently accessed openings with cables, cable trays, blank openings or multiple penetrations



**302-999-0502**



## SMOKE SEALANTS

**EAST COAST FASTENERS, INC**

### SAS Sealant

Smoke & Acoustic, High-grade acrylic latex

Code	Description	Qty.
66652	20.2 oz. foil pack	12
66650	5 gal.	1

Tested to  
ASTM E84



#### FEATURES

- Meets LEED requirements
- Excellent for large openings
- Impedes sound transfer
- Water clean up
- Easy to dispense
- Use both vertically or horizontally
- Interior application
- STC rating 69
- 3 year shelf life
- Color: White

**APPLICATION** • Provides a permanent seal for penetrations, membrane openings and static or dynamic joints in smoke or sound rated assemblies

- In the event of a fire it will prevent the movement of smoke and impede the transfer of sound in non-fire rated assemblies

#### RECOMMENDED FOR

- Metallic and nonmetallic pipes
- Outlet and receptacle boxes
- Membrane penetrations
- Head of wall
- Bottom of wall
- Wall to wall joints



### Metacaulk® RS 136

Fireblock / Smoke seal caulk

Code	Description	Qty.
66408	10.3 oz. cartridge	12



#### FEATURES

- Smoke & acoustic caulk
- Non-combustible
- Interior application
- Tested in accordance with ASTM E136
- Color: Red

**APPLICATION** • General purpose fireblock, draft stop

- Beds and seals small voids, splices and gaps
- Water soluble
- Not for use in vibration or wet environments

**RECOMMENDED FOR** • Large openings • PVC/CPVC pipe (closed only) • EMT • Steel, Copper, and Aluminum Pipe



### Draft-Block™

Expanding polyurethane foam

Code	Description	Qty.
96500	12 oz. aerosol	12

#### FEATURES

- Expands 3X
- Tack-free in approx. 45 min.
- No urea or formaldehyde

**APPLICATION** • Excellent filler which bonds and insulates

- Fill voids, cracks, crevices and small cavities on flat or irregular surfaces
- Reduces sound transmission
- Totally dielectric



\*FBC™ System Compatible™ indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® pipe and fittings.

\*\*FBC®, FlowGuard Gold®, BlazeMaster® and Corzan® are licensed trademarks of The Lubrizol Corporation.

**302-999-0502**





## FIRESTOP ACCESSORIES

**EAST COAST FASTENERS, INC**

### Caulking Guns

Cartridge & sausage

Code	Description	Qty.	FEATURES
66114	10.3 oz. gun	1	• Industrial grade
66115	30 oz. gun	1	
66116	20.2 oz. foil pack gun	1	
66117	Replacement tips	25	



### Universal Collar

For concrete, wood & gypsum

Code	Description	Qty.	FEATURES
66091	2" x 50' roll	1	• Galvanized steel
66095	1" x 50' roll	1	



### 6lb./ cu. ft. Safing

Mineral wool backing

Code	Description	Qty.	FEATURES
66101	2" thick	8	• Non-combustible



### Delta Deck Plugs

36" long

Code	Description	Qty.	FEATURES
66401	1-1/2" x 3-1/2" x 4-1/2"	48	• Non-combustible
66403	1-1/2" x 4-1/2" x 5-1/2"	39	• Mineral wool backing for fluted deck
66409	3" x 5" x 7"	18	



### Foam Backer Rod

Fills gaps prior to sealing

Code	Description	Qty.	FEATURES
66112	1" x 75'	1	• Easy-to-use



**302-999-0502**



## RELATED PRODUCTS

**EAST COAST FASTENERS, INC**

### Cable End Cap

Quick seal against moisture & corrosion

Code	Description	Qty.
50231	QC2 .75" x 1.25" red	50
50232	QC3 1" x 1.5" orange	50
50233	QC4 1.25" x 1.75" gray	25
50234	QCS 1.5" x 2" black	25

#### FEATURES

- No heat required
- Instant seal
- Simple to install
- Reinforced ends
- Pliable butyl mastic sealant
- Works in extreme temps



### Fiberglass Tying Cord

For power cables

Code	Description	Qty.
50219	QTC250 350'	1

#### FEATURES

- For use with Arc Sleeve
- For tying wiring harnesses & cable looms



### Arc Sleeve

For large power and utility cables

Code	Description	Qty.
50241	500/700 3'	1

#### FEATURES

- Fire and fault arc protection
- Easy snap-on application
- Custom dip-molded
- Fits tightly around cables
- For large electrical cables



**302-999-0502**





## OTHER PRODUCTS

**EAST COAST FASTENERS, INC**

### K.O. Dirt Blaster™

Dirt and grease stripper

Code	Description	Qty.
88438	20 oz. aerosol	12

#### FEATURES

- Dissolves grease quickly, Quick dry
- Pressure washes small condenser coils without a water rinse

**APPLICATION** • Non-conductive, non-flammable; will not short out electrical equipment • Effective on restaurant grease and other greasy surfaces • No CFC's



### Lets-Go™

Penetrant, lubricant and freeze-up preventer

Code	Description	Qty.
73012	12 oz. aerosol	12

#### FEATURES

- Loosens frozen bolts, nuts & joints
- Protects from water & weather.

**APPLICATION** • Covers metal surfaces with a clinging, tough, long-lasting film of lubricant • The wetting power acts quickly on rusted and seized parts • Displaces moisture from wiring and equipment.



### Golden Pipe Shredder™

Restore welded plastic fittings

Code	Description	Qty.
98040	1-1/2"	4
98041	2"	4
98042	3"	4
98043	4"	4
98050	Set of 4 tools	1

*Sold separately in 4 sizes or as a set of 4 with durable carry case*

#### FEATURES

- Carbide cutting blades
- Unique guiding system
- Made of heat tempered steel
- One piece body

**APPLICATION** • Reams out solvent welded plastic fittings so they can be reused • Cuts stub outs to be flush or recessed with wall • Removes cracked water closet flanges



### RectorSeal® EP-200

Epoxy putty

Code	Description	Qty.
97600	2 oz.	24
97601	2 oz. refill	24
97602	Blistercard	12
97606	EP-400 4 oz.	12



#### FEATURES

- Mixes like putty
- Hardens in minutes
- Can be drilled, taped, filed, machined, sanded and painted
- Bonds and fills a variety of materials



### Dark Cutting Oil

Low rpm machine thread cutting oil

Code	Description	Qty.
94392	qt.	12
94272	gal.	6
94192	5 gal.	1
94111	55 gal.	1

#### FEATURES

- Increased lubricity/longer die life
- Penetrates quickly
- Keeps dies cool

**APPLICATION** • Designed to reduce friction • Effective coolant and anti-weld agent • An extreme pressure lubricant during thread cutting operations • Will not congeal above 20°F



### GoldenGrip™

Internal pipe wrench

Code	Description	Qty.
97250	Single 1/2"	6
97251	Single 3/4"	6
97252	Double 1" - 1-1/4"	3
97253	Double 1-1/2" - 2"	3
97250	Set of 4 tools	1

*Sold separately in 4 sizes or as a set of 4 with durable carry case*

U.S. Patent No. 6,675,679B2

#### FEATURES

- Self-locking & reversible
- No thread damage
- Works in tight spaces

**APPLICATION** • The right tool for quick and easy installation or extraction of pipe nipples • Self-locking, reversible internal wrench can be used with ratchets, extensions and impact wrenches



**302-999-0502**



# BIG FOOT SYSTEMS® FRAME SUPPORTS

**EAST COAST FASTENERS, INC**

## Multi Foot

Frame support ideal for smaller systems



Code	Description	Qty.
87711 (RSP16)	16" Multi Foot	1
87712 (RSP24)	24" Multi Foot	2

**FEATURES**

- Strong and Lightweight
- Weather resistant PVC - Rubber/PVC
- Linear track holds 1/2" hex head bolts
- Two 7/8" long bolts included

Max load capacity:  
RSP16 - 572 lbs.  
RSP24 - 1045 lbs.

<b>87711</b>	<b>87712</b>
H = 3 <sup>3</sup> / <sub>4</sub> "	H = 3 <sup>3</sup> / <sub>4</sub> "
W = 7"	W = 8 <sup>3</sup> / <sub>4</sub> "
L = 15 <sup>3</sup> / <sub>4</sub> "	L = 24"



## H-Frame

Accepts standard 1-5/8" strut, optimum support



Code	Description	Qty.
87713 (RSPD12)	H-Frame Kit w/ 12" Square	1
87714 (RSPD18)	H-Frame Kit w/ 18" Square	1
87715 (RSPD24)	H-Frame Kit w/ 24" Square	1

*each kit contains 2 feet*

**FEATURES**

- Ideal rooftop support of equipment & systems
- Weather resistant
- Recycled crumb rubber pad
- Accepts one 5/8" strut (not included)
- Build custom frames and supports

Max load capacity:  
RSPD12 - 661 lbs.  
RSPD18 - 1100 lbs.  
RSPD24 - 1100 lbs

<b>87713</b>	<b>87714</b>	<b>87715</b>
H = 3 <sup>1</sup> / <sub>2</sub> "	H = 4 <sup>1</sup> / <sub>4</sub> "	H = 4 <sup>3</sup> / <sub>4</sub> "
W = 13"	W = 19"	W = 25 <sup>1</sup> / <sub>4</sub> "
L = 13"	L = 19"	L = 25 <sup>1</sup> / <sub>4</sub> "



**302-999-0502**





## POLYMER & RUBBER RISERS

**EAST COAST FASTENERS, INC**

### Polymer Risers

Simple lightweight raised mounting support



Code	Description	Qty.
87761 (PR-351N-I)	14" Polymer Riser	20
87762 (PR-351N-M)	18" Polymer Riser	20
87763 (PR-351N-L)	39" Polymer Riser	4
87765 (PRC-351N)	End Caps	1 Pair

#### FEATURES

- Ideal for piping, duct runs, cable trays and condensers
- Weather resistant PVC
- Linear track holds 3/8" hex head bolts
- Two 7/8" long bolts included

Max load capacity: PR-351N-I - 308 lbs.  
PR-351N-M - 397 lbs. PR-351N-L - 880 lbs



### Fix-It-Foot

Additional vibration isolation and stability




Code	Description	Qty.
87771 (RMB10)	Fix-It-Foot 10"	1
87773 (RMB16)	Fix-It-Foot 16"	1
87775 (RMB24)	Fix-It-Foot 24"	1
87776 (RMB40)	Fix-It-Foot 40"	1

#### FEATURES

- Ideal for rooftop support of equipment & systems
- Weather resistant
- Recycled crumb rubber pad
- Recessed underside permits solid stance
- Aluminum track permits the use of standard strut hardware (not included)

Max load capacity: RMB10-181 lbs. RMB16-282 lbs.  
RMB24-494 lbs. RMB40-650 lbs.

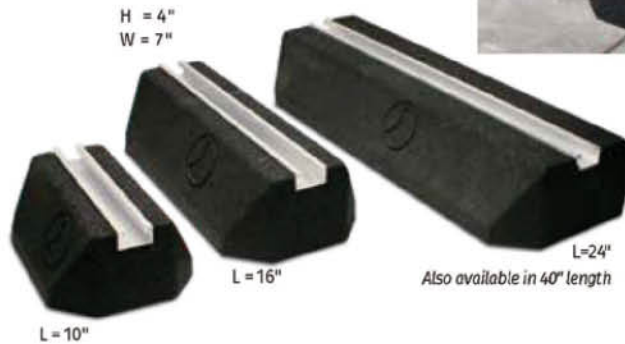

### Fix-It-Foot Low

Low profile rubber riser



Code	Description	Qty.
87772 (RMB10L)	Fix-It-Foot Low 10"	1
87774 (RMB16L)	Fix-It-Foot Low 16"	1

#### FEATURES

- Ideal for rooftop support of equipment & systems
- Weather resistant
- Recycled crumb rubber pad
- Recessed underside permits stability
- Aluminum track permits the use of standard strut hardware (not included)

Max load capacity: RMB10L - 181 lbs RMB16L - 282 lbs



**302-999-0502**